

WIRELESS HEADPHONES WS4 / WS5 / WS AUDIO



WS5

The WS4 /WS5 can be a stand alone unit and connect with the coil for an extremely ergonomic and lightweight configuration.



WS4


The WS4 Module can be unclipped and mounted on the stem to make the most of the control screen, the target display and all the settings. It is then ideally supplemented by the WSA wireless headphones.



The WS AUDIO wireless headphones are the slave when the remote control or WS4 MASTER are switched on. They are only compatible with:

- 1/ DEUS marketed since 2018 and updated to V6 (update available 12/2022).
- 2/ X35 or HF coils.
- 3/ ORX metal detectors.

DEUS - 3 CONFIGURATIONS

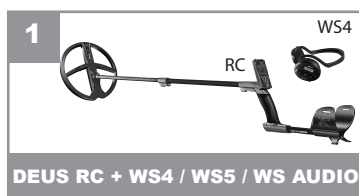

(975g in hand with 22.5cm coil)

The remote control is master and controls the coil, the functions and the settings.



(820g in hand with the 22.5 cm coil)

The WS4 MASTER controls the coil, adjusts all the settings with a target display.



(750g in hand with the 22.5 cm coil)

The WS4 / WS5 controls the coil, adjusts all the settings with a target display.


WS4 / WS5 FEATURES

the setting value or the number of the factory program P1, P2, etc

Increase / Decrease / change Programs.

ON : Press

OFF : Press and .



the battery charge level of the coil and the headphones alternately with



Displayed : Coil battery level

Not displayed : Headphones battery level

Radio link with the active coil

Prospecting MENU :

DISC : Discrimination

SENS : Sensitivity

GND : Ground

FREQ : Frequency

TONE : Tones

VOL : Audio Volume

COIL : Coil Choice

Pairing : Coils / MI-6 / WS AUDIO

P1 to P10 : Programs

Pairing WS AUDIO to Remote control



Press **OPTION**, then until **HEADPHONES**

Press until you reach **WS AUDIO** and press **SELECT**

Switch ON the WS AUDIO by holding the key down for 5 seconds.

Pairing WS AUDIO to WS4 MASTER



Press until **COIL** and until you reach **IIP**, then press 5 seconds.

Switch ON the WS AUDIO by holding the key down for 5 seconds.

Shortcut : Press 5 seconds Switch ON the WS AUDIO by holding the key down for 5 seconds.